

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 May 2006 (11.05.2006)

PCT

(10) International Publication Number  
**WO 2006/049108 A1**

(51) International Patent Classification<sup>7</sup>: **F04B 39/00**,  
53/00, F16F 15/22, 15/28

**NAGAO, Takahide. TSUBOI, Kosuke. KAKIUCHI, Takashi.**

(21) International Application Number:  
PCT/JP2005/019947

(74) Agents: **IWAHASHI, Fumio** et al.; c/o Matsushita Electric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi, Osaka 5718501 (JP).

(22) International Filing Date: 25 October 2005 (25.10.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004-317879 1 November 2004 (01.11.2004) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC INDUSTRIAL CO., LTD.** [JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka, 5718501 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): **KUBOTA, Akihiko.**

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: RECIPROCATING COMPRESSOR

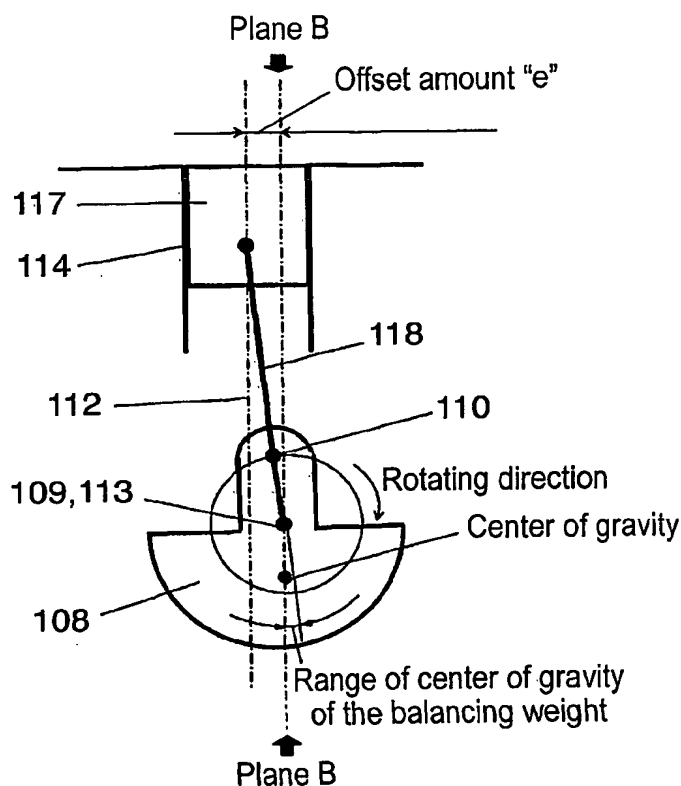

(57) Abstract: A highly reliable reciprocating compressor works efficiently with less energy, and produces smaller vibrations. This reciprocating compressor includes a crankshaft, a block, a piston, a connecting rod, and a balancing weight. The cylinder is placed offset such that an axis line thereof and an axis line of the main shaft do not cross each other. The center of gravity of the balancing weight is placed substantially opposite to the center of the eccentric section with respect to the axis line of the main shaft and deviated along a rotating direction of the main shaft from the place just opposite to the center of the eccentric section. The foregoing construction allows reducing lateral pressure of the piston, thereby increasing the reliability and efficiency of the reciprocating compressor, and allows to cancel unbalancing force produced by motions of the piston, the connecting rod and the eccentric section with motion of the balancing weight.



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*